(54) Title: PROCESS FOR CONVERTING AN ALCOHOL TO THE CORRESPONDING FLUORIDE

(57) Abstract

A process for preparing a fluoride from its corresponding alcohol comprises the steps of (a) forming a mixture comprising (i) at least one fluorinated, saturated aliphatic or alicyclic sulfonyl fluoride (for example, perfluorobutanesulfonyl fluoride) and (ii) at least one primary or secondary alcohol; and (b) adding a molar excess of at least one strong, aprotic, non–nucleophilic, hindered, double bond–containing, organic base (for example, 1,8–diazabicyclo[5.4.0]undec–7–ene (DBU)) to the mixture. The process is cost effective and provides excellent yields under variable reaction conditions.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PROCESS FOR CONVERTING AN ALCOHOL TO THE CORRESPONDING FLUORIDE

Field of the Invention

5   This invention relates to a process for converting a primary or secondary alcohol to its corresponding fluoride.

Background of the Invention

10   Organic compounds selectively substituted with fluorine have utility as drugs, agrichemicals, medical imaging agents, and high polarization additives for ferroelectric liquid crystal compositions, as well as in many other applications. Fluorinated steroids and

15   drugs are often more potent than their unsubstituted analogs due to increased lipophilic behavior, suppression of undesired metabolic reactions, and reduced binding to serum proteins. (See, e.g., J. A. Katzenellenbogen et al., J. Org. Chem. 49, 4900

20   (1984).) Chiral ferroelectric liquid crystal compounds having a fluorine atom at the chiral center exhibit larger spontaneous polarizations and greater smectic character than their hydrocarbon analogs. (See, e.g., H. Nohira et al., Mol. Cryst. Liq. Cryst. 180B, 379,

25   385 (1990).)

The preparation of such selectively fluorinated materials poses special difficulties due to a tendency for hydrogen fluoride elimination under the conditions conventionally used to prepare these materials. One

30   commonly used strategy is to replace a hydroxyl group (in a starting compound) with a fluorine atom, but this is not an easy transformation since carbonium ion rearrangements and dehydration to an olefin can occur. (See, e.g., W. J. Middleton, J. Org. Chem. 40, 574

35   (1975).)

Such side reactions can be minimized by the use of DAST (diethylaminosulfur trifluoride) as the fluorinating reagent. DAST fluorinations can be carried out under mild conditions, making DAST more

5   convenient to use than some other fluorination reagents such as sulfur trifluoride. (See, e.g., M. Hudlicky, Organic Reactions, volume 35, page 513, John Wiley and Sons, New York (1988).) However, DAST is not commercially available and is costly to produce (due,

10 e.g., to the need for specialized preparation and handling equipment), and the yields obtained using DAST are often only moderate.

Selectively fluorinated materials have also been prepared from their hydroxyl-functional equivalents

15 (primary and secondary alcohols) using perfluoroalkanesulfonyl fluorides and strong bases in organic solvent (as described by B. Benua-Skalmowski and H. Vorbrueggen in Tetrahedron Letters 36 (15), 2611 (1995), as well as in International Patent Publication

20 No. WO 96/13474 (Vorbrueggen) and U. S. Patent No. 5,760,255 (Vorbrueggen et al.)). This method has involved the use of 2 to 3 equivalents of base, with addition of the perfluoroalkanesulfonyl fluoride to a premix of alcohol and base.

25 However, there is a continuing need in the art for a selective fluorination process that is useful on an industrial scale. Such a process should not only be cost effective and capable of being carried out using common multipurpose industrial equipment, but should

30 also be able to consistently provide good to excellent yields under the variable conditions commonly encountered in a factory setting.

Summary of the Invention

Briefly, this invention provides an improved, industrially useful process for preparing a fluoride from its corresponding alcohol using a fluorinated
5   sulfonyl fluoride as the source of the fluorine. The process comprises the steps of (a) forming a mixture comprising (i) at least one fluorinated, saturated aliphatic or alicyclic sulfonyl fluoride (e.g., perfluorobutanesulfonyl fluoride) and (ii) at least one
10 primary or secondary alcohol (e.g., 6-hydroxyoctene); and (b) adding a molar excess of at least one strong, aprotic, non-nucleophilic, hindered, double bond-containing, organic base (e.g., DBU, 1,8-diazabicyclo[5.4.0]undec-7-ene) to the mixture. (As
15 used herein, the term "strong organic base" means an organic base that is capable of enabling the formation of a sulfonate ester without substantially inducing elimination of, e.g., hydrogen fluoride or sulfonate anion.) Due to the exothermic nature of the reaction,
20 the mixture is preferably precooled, e.g., to a temperature in the range of about -30°C to about 0°C, prior to addition of the organic base.

It has been discovered that the process of the invention, which involves the addition of base to a
25 premix of alcohol and sulfonyl fluoride, surprisingly provides significantly better selectivity and significantly higher yields of the desired fluoride than both the prior art sulfonyl fluoride-based method (which involves the addition of sulfonyl fluoride to a
30 premix of base and alcohol) and the use of DAST. Furthermore, unlike the prior art sulfonyl fluoride-based method (which requires the use of 2 to 3 equivalents of base), the process of the invention consistently provides excellent yields, regardless of
35 the size of the excess of base utilized.

As with the use of DAST, the process of the invention, when carried out using a chiral alcohol, proceeds with complete inversion of configuration at the chiral center. The process can, however, be

5 carried out more safely than processes which utilize DAST as the fluorinating reagent, as, unlike DAST, the reactants do not fume in the open air, decompose violently at temperatures above 50°C, or burn the skin upon contact.

10 Furthermore, since the process of the invention utilizes fluorinated sulfonyl fluorides, rather than the higher cost diethylaminosulfur trifluoride (DAST), and since it does not require as large an excess of base as the prior art sulfonyl fluoride-based method,

15 it provides better selectivity and higher yields of desired product (than the prior art methods) at lower raw material costs. The process of the invention therefore satisfies the need in the art for a cost effective selective fluorination process that

20 consistently provides excellent yields under variable reaction conditions.

In another aspect, this invention also provides an improved, sulfonyl fluoride-based selective fluorination process that utilizes the conventional

25 premix of base and alcohol but a molar excess of base of less than 2 equivalents per equivalent of alcohol.

Detailed Description of the Invention

Sulfonyl fluorides suitable for use in the process

30 of the invention are fluorinated, saturated aliphatic or alicyclic sulfonyl fluorides.

A useful class of such sulfonyl fluorides can be represented by the general formula R_fSO_2F, where R_f is selected from the group consisting of perfluorinated

35 alkyl groups having from 1 to about 10 carbon atoms;

partially-fluorinated alkyl groups having from 1 to about 10 carbon atoms; unsubstituted or perfluoroalkyl-substituted, perfluorinated cycloalkyl groups having from about 4 to about 8 carbon atoms; and unsubstituted

5 or perfluoroalkyl-substituted, partially-fluorinated cycloalkyl groups having from about 4 to about 8 carbon atoms. Preferably, R_f is a perfluorinated alkyl group.

Perfluorinated sulfonyl fluorides can be prepared by electrochemical fluorination of the corresponding

10 hydrocarbon sulfonyl fluorides, as described in U.S. Pat. No. 2,732,398 (Brice et al.). (See also P. W. Trott et al, 126[th] National Meeting of the American Chemical Society, abstract at page 42-M, New York, N.Y. (1954).) Perfluorooctanesulfonyl fluoride is also

15 commercially available from 3M Co. under the tradename Fluorad™ fluorochemical sulfonyl fluoride FX-8. Partially-fluorinated sulfonyl fluorides can be prepared from hexafluoropropylene oxide and the ring-opened sulfur trioxide oxetane of tetrafluoroethylene,

20 as described, e.g., in Kirk-Othmer Encyclopedia of Chemical Technology, Fourth Edition, Volume 11, pages 562-63, John Wiley & Sons, New York (1994).

Representative examples of sulfonyl fluorides suitable for use in the process of the invention

25 include CF_3SO_2F, $C_2F_5SO_2F$, $C_4F_9SO_2F$, $C_6F_{13}SO_2F$, $C_8F_{17}SO_2F$, $C_{10}F_{21}SO_2F$, cyclo-$(C_6F_{11})SO_2F$, C_2F_5-cyclo-$(C_6F_{10})SO_2F$, $H(CF_2)_4SO_2F$, $H(CF_2)_8SO_2F$, and mixtures thereof. Preferably, perfluorobutanesulfonyl fluoride, perfluorohexanesulfonyl fluoride,

30 perfluorooctanesulfonyl fluoride, and mixtures thereof are utilized, as these sulfonyl fluorides are liquids under normal conditions and can be obtained in high yields from electrochemical fluorination processes, at correspondingly low costs (see, e.g., T. Abe et al.,

35 "Electrochemical Fluorination (Simons Process) as a

Route to Perfluorinated Organic Compounds of Industrial

Interest," in _Preparation, Properties, and Industrial_

Applications of Organofluorine Compounds, R. E. Banks

(editor), page 37, Ellis Howard (1982)). Most

5   preferably, perfluorobutanesulfonyl fluoride is

utilized in the process of the invention, due to its

solubility in common organic solvents and the resulting

ease of organic/aqueous phase separations.

         Alcohols suitable for use in the process of the

10   invention are primary and secondary alcohols, including

both mono-alcohols (carbinols) and polyols. A useful

class of such alcohols can be represented by the

general formula R_1R_2CH-OH, where R_1 and R_2 are

independently selected from the group consisting of

15   branched or linear aliphatic groups, alicyclic groups,

araliphatic groups, aromatic groups, hydrogen, branched

or linear fluoroaliphatic groups, fluoroalicyclic

groups, fluoroaraliphatic groups, and fluoroaromatic

groups (preferably, aliphatic, fluoroaliphatic,

20   araliphatic, or alicyclic; more preferably, aliphatic,

fluoroaliphatic, or araliphatic). The aliphatic,

alicyclic, araliphatic, fluoroaliphatic,

fluoroalicyclic, and fluoroaraliphatic groups can

contain catenary (in-chain) heteratoms (such as oxygen,

25   nitrogen, or sulfur) and/or up to two olefinic double

bonds. Here and throughout the specification, the

prefix "fluoro-" and the term "fluorinated" are meant

to include both perfluorinated and partially-

fluorinated moieties or compounds.

30   Thus, the fluoroaliphatic groups can comprise one

or more moieties selected from the group consisting of

branched or linear aliphatic groups, alicyclic groups,

and araliphatic groups in which any one or more of the

hydrogen atoms is replaced with a fluorine atom. For

35   example, the fluoroaliphatic groups can comprise a

moiety that can be represented by the formula $-D-R_f'$, where D is selected from the group consisting of a covalent bond, $-O-$, $-OC_rH_{2r}-$, $-O(C_rH_{2r}O)_t-C_rH_{2r}-$, $-C_rH_{2r}-$, and $-(C_rH_{2r}O)_t-C_rH_{2r}-$, where r is an integer of 1 to about 20 and t is an integer of 1 to about 6; and R_f' is selected from the group consisting of $-(C_xF_{2x}O)_zC_yF_{2y+1}$ and $-C_qF_{2q}X$, preferably $-(C_xF_{2x}O)_zC_yF_{2y+1}$, where x is independently an integer of 1 to about 10 (preferably, 1 to about 4) for each $C_xF_{2x}O$ group, y is an integer of 1 to about 10 (preferably, 1 to about 6), z is an integer of 1 to about 10 (preferably, 1 to about 3), q is an integer of 1 to about 15, and X is selected from the group consisting of hydrogen and fluorine.

Representative examples of useful alcohols include

$CH_3CHOHCH(CH_3)_2$,

$C_6H_{11}OH$,

$C_6F_{11}CHOHCH_3$,

$C_6H_5CH_2CH_2CH_2OH$,

$C_6F_5CH_2CH_2CH_2OH$,

$C_6H_5CHOHC_6H_5$,

$C_6F_5CHOHC_6H_5$,

$CH_3OCOCH_2CHOHCH_2CH_3$,

$C_{10}H_{11}OH$ (1,2,3,4-tetrahydro-2-hydroxynaphthalene),

$CH_2=CH(CH_2)_nCH(OH)CH_2OCH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_6H_5CH_2O(CH_2)_nCH(OH)CH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$,

$CH_3C(=O)O(CH_2)_nCH(OH)CH_2OCH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$,

$THP-O(CH_2)_nCH(OH)CH_2OCH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_8H_{17}-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_7H_{15}-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_6H_{13}-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_8H_{17}O-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_7H_{15}O-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_6H_{13}O-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$CH_3(CH_2)_bCH(OH)(CH_2)_mCH=CH_2$,

$CH_3(CH_2)_bCH(OH)(CH_2)_mOC(=O)CH_3$, $CH_3(CH_2)_bCH(OH)(CH_2)_mO-THP$,

$CH_3(CH_2)_bCH(OH)(CH_2)_mOCH_2C_6H_5$, thymidine, 5'-deoxythymidine, uridine, 2'-deoxyuridine, 2'-deoxy-5-(trifluoromethyl)uridine, guanosine, 2'-deoxyguanosine, adenosine, 2'-desoxyadensoine, 5'-deoxyadenosine, and mixtures thereof, where x is independently an integer of 1 to about 10 (preferably, 1 to about 4) for each $C_xF_{2x}O$ group, y is an integer of 1 to about 10 (preferably, 1 to about 6), and z is an integer of 1 to about 10 (preferably, 1 to about 3), where n and m are independently integers of one to about ten, b is an integer of zero to about 10, and THP = tetrahydropyranyl. Although the preceding representative structures are shown as racemic materials, the process of the invention can be carried out using chiral, racemic, or non-optically active carbinols. Steroidal carbinols (for example 16alpha-hydroxyestone, 3beta-hydroxycholestan, 3alpha-andostan, 16beta-hydoxy-3-[[(trifluoromethyl)sulfonyl]oxy]esta-1,3,5(10)-trien-17-one, and mixtures thereof) are also useful in the process of the invention.

Preferred alcohols include
$CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,
$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,
$CH_3C(=O)O(CH_2)_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,
$THP-OCH_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,
$CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,
$CH_3C(=O)O(CH_2)_2CH(OH)CH_2CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,
$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,
$THP-O(CH_2)_2CH(OH)CH_2CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,
$CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,
$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,
$CH_3C(=O)O(CH_2)CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,
$THP-O(CH_2)_2CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,
$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2C_7F_{15}$,
$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2C_3F_7$,

-8-

$C_8H_{17}-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,

$C_8H_{17}-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,

$C_9H_{17}O-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,

$C_8H_{17}-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2OCH_2C_7F_{15}$,

$CH_3CH(OH)(CH_2)_4OCH_2C_6H_5$, $CH_3CH_2CH(OH)(CH_2)_4OCH_2C_6H_5$,

$CH_3CH_2CH_2CH(OH)(CH_2)_4OCH_2C_6H_5$, $CH_3(CH_2)_3CH(OH)(CH_2)_4OCH_2C_6H_5$,

$CH_3CH_2CH(OH)(CH_2)_3CH=CH_2$, and mixtures thereof, where THP = tetrahydropyranyl.

Bases suitable for use in the process of the invention are strong, aprotic, non-nucleophilic, hindered, double bond-containing, organic bases. As used herein, the term "strong organic base" means an organic base that is capable of enabling the formation of a sulfonate ester without substantially inducing elimination of, e.g., hydrogen fluoride or sulfonate anion. Preferably, the base exhibits a gas phase proton affinity of at least about 1000 kJ/mole (more preferably, at least about 1030 kJ/mole). The term "non-nucleophilic," as used herein, means a base that does not undergo an irreversible reaction with the sulfonyl fluoride group and thereby reduce the yield of desired fluorocompound, and "hindered" refers to a base having a spatial arrangement of atoms such that displacement of a sulfonate ester group by the base is essentially prevented and does not occur. (See, for example, the reaction description provided by H. Vorbrueggen et al., Bull. Soc. Chim. Belg. <u>103</u>, 453 (1994).)

Representative examples of bases suitable for use in the process of the invention include N-alkyl pyrrolidines, for example, 1,5-diazabicyclo[4.3.0]non-5-ene (DBN) and 1,8-diazabicyclo[5.4.0]dec-7-ene (DBU); guanidines, for example, N,N,N',N',N"-pentamethylguanidine; and mixtures thereof. Preferably, 1,8-diazabicyclo[5.4.0]undec-7-ene (DBU)

(proton affinity of 1048 kj/mole), 1,5-
diazabicyclo[4.3.0]non-5-ene (DBN) (proton affinity of
1038 kj/mole), and mixtures thereof are used in the
process of the invention, as these bases provide high
5   conversion to the desired fluorocompound, with complete
inversion of configuration when a chiral alcohol is
used. DBU and DBN are also readily commercially
available, are liquids at room temperature, and
dissolve easily in preferred reaction media. DBU is
10   more preferred, e.g., from a cost perspective.

Generally, the process of the invention can be
carried out by first combining (preferably, in a dry
reaction vessel equipped with a stirring mechanism) at
least one fluorinated, saturated aliphatic or alicyclic
15   sulfonyl fluoride (a molar excess) and at least one
primary or secondary alcohol. The resulting mixture is
preferably protected from atmospheric moisture under a
dry, inert atmosphere (for example, nitrogen) or by
evacuation and sealing of the vessel. The mixture is
20   preferably cooled (for example, using a cooling bath)
to below ambient temperature (for example, a
temperature in the range of about -30°C to about 0°C,
more preferably, about -20°C to about 0°C,), and at
least one strong, aprotic, non-nucleophilic, hindered,
25   double bond-containing, organic base is then added.
The base is preferably added sufficiently slowly that a
temperature below about 10°C can be maintained. A molar
excess of base (more than one equivalent (preferably,
at least about 1.2 equivalents; more preferably, at
30   least about 1.4 equivalents) per equivalent of alcohol)
can be utilized to get maximal conversion of the
alcohol to the desired fluorocompound. (Due to raw
material cost considerations, the process of the
invention is most preferably carried out using less

than about 2 equivalents of both sulfonyl fluoride and
base per equivalent of alcohol.)

Preferably, an inert solvent (for example,
toluene, diglyme, xylene, dichloromethane, hexane,
perfluorohexane, heptafluoropropyl ethyl ether,
heptafluoropropyl methyl ether, 2-
(trifluoromethyl)hexafluoropropyl methyl ether, 2-
(trifluoromethyl)hexafluoropropyl ethyl ether, and the
like, and mixtures thereof) is utilized to facilitate
the mixing of the reactants, etc. Such solvent can be
added to the reaction vessel at any stage of the
process but is preferably added at any time prior to,
or simultaneously with, the addition of base.

The reactants can be allowed to react for a short
time (e.g., from 15 minutes to one hour), preferably
with the cooling bath in place. Then the bath can be
removed and the mixture allowed to stir for a short
time (e.g., from 15 minutes to one hour). Generally,
with most high boiling alcohols, the reaction can then
be quenched by the addition of water to the vessel.
Such addition of water generally leads to the formation
of three phases: a top yellow phase comprising the
desired fluorocompound dissolved in the reaction medium
or solvent; a clear, colorless middle phase comprising
water, unreacted base, and salt; and a brownish black
bottom phase comprising salt, some solvent, and some
fluorocompound product. The top organic phase can then
be separated from the middle and bottom phases and the
latter phases combined and re-extracted with more of
the reaction solvent (or with another nonpolar organic
liquid that will form a phase with water). The desired
fluorocompound product can then be recovered from the
combined middle and bottom phases (e.g., by re-
extraction with a water-insoluble organic solvent) and

acid washed (for example, with aqueous HCl) to remove salts and unreacted base.

When the fluorocompound is high boiling, the solvent can then be removed in vacuo and the resulting crude product purified by, for example, fractional distillation or column chromatography. When the fluorocompound is low boiling and high boiling solvent is used, the crude product can be distilled out of the solvent and then purified by, for example, fractional distillation.

The process of the invention, which utilizes a premix of sulfonyl fluoride and alcohol, provides excellent yields over a wide range of excess amounts of base and is therefore extremely useful in an industrial setting.

However, for applications where such flexibility is not necessary, it is possible to obtain improved yields relative to the prior art sulfonyl fluoride-based method (which utilizes a premix of base and alcohol and 2 to 3 equivalents of base per equivalent of alcohol) by simply limiting the amount of excess base to less than 2 equivalents. Thus, this invention further provides a selective fluorination process comprising the steps of (a) forming a mixture comprising (i) at least one primary or secondary alcohol and (ii) a molar excess of less than 2 equivalents of at least one strong, aprotic, non-nucleophilic, hindered, double bond-containing, organic base per equivalent of the alcohol; and (b) adding at least one fluorinated, saturated aliphatic or alicyclic sulfonyl fluoride to the mixture.

Objects and advantages of this invention are further illustrated by the following examples, but the particular materials and amounts thereof recited in these examples, as well as other conditions and

details, should not be construed to unduly limit this
invention.

<div align="center">EXAMPLES</div>

5   In the following Examples, all temperatures are in
degrees Celsius and all parts and percentages are by
weight unless indicated otherwise. Commercially
available materials were chemically transformed by
reaction pathways well-known to those skilled in the
10   art and detailed in the Examples. Preparations of the
fluorinated alcohols used as starting materials in some
of the Examples can be found in U.S. Patent No.
5,702,637 (Kistner et al.), U.S. Patent No. 5,474,705
(Janulis et al.), and U.S.S.N. 08/998,400 (Hasegawa et
15   al.).

Compounds prepared in the various Examples of this
invention were characterized by gas and liquid
chromatography and by ^{19}F-NMR spectroscopy.

20   **Example 1**
Preparation of (S)-6-(2-(2-
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohex-1-ene in Methyl t-Butyl
Ether

25   A one liter flask which had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (R)-6-(2-(2-
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
30   difluoroethoxy)-5-hydroxyhex-1-ene (22 g, MW=530, 0.04
mole), 19.4 g (0.06 mole) perfluorobutanesulfonyl
fluoride (hereinafter, PBSF, MW=302), and 30 mL methyl
t-butyl ether were added to the flask, and then the
resulting mixture was cooled to 0°C using a cooling
35   bath. After about 5 minutes, the addition of 9.4 g DBU

<div align="center">-13-</div>

(MW=152, 0.060 mole) was begun. The DBU was added at

such a rate that the temperature did not rise above

10°C. The cooling bath was removed, and the mixture was

stirred for one hour. While stirring, 200 mL toluene

5   and then 200 mL water were added. Three phases formed,

and the top yellow toluene layer was separated as

product. The toluene layer was washed three more times

with water (200 mL). The toluene layer was then

stripped of solvent at reduced pressure using a rotary

10   evaporator to give 22 g of material which by gas

chromatography (hereinafter, gc) analysis was found to

contain 9 area % of elimination product, 88 area % of

the desired (S)-6-(2-(2-

(nonafluorobutoxy)tetrafluoroethoxy)-2,2-

15   difluoroethoxy)-5-fluorohex-1-ene, and 3 area % of

unreacted (R)-6-(2-(2-

(nonafluorobutoxy)tetrafluoroethoxy)-2,2-

difluoroethoxy)-5-hydroxyhex-1-ene.

20   **Example 2**

Preparation of (S)-6-(2-(2-

(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-

difluoroethoxy)-5-fluorohex-1-ene in Toluene

      A one liter flask which had been oven dried was

25   assembled hot with an overhead stirrer, an addition

funnel, and a thermocouple and was kept under positive

nitrogen pressure. (R)-6-(2-(2-

(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-

difluoroethoxy)-5-hydroxyhex-1-ene (30 g, MW=530, 0.057

30   mole), PBSF (31.5 g, MW=302, 0.102 mole), and 60 mL of

toluene were added to the flask, and then the resulting

mixture was cooled to 0°C using a cooling bath. After

about 5 minutes, the addition of 15 g of DBU (MW=152,

0.102 mole) was begun. The DBU was added at such a

35   rate that the temperature did not rise above 10°C. The

cooling bath was removed, and the mixture was stirred
for one hour. While stirring, 60 mL of toluene and
then 30 mL of water were added. Three phases formed,
and the top yellow toluene layer was separated as
5   product. The toluene layer was washed with 7% aqueous
HCl (60 mL). The toluene layer was then stripped of
solvent at reduced pressure on a rotary evaporator to
give 22 g of material which by gc analysis was found to
contain 8 area % of eliminated product and 92 area % of
10   the desired (S)-6-(2-(2-
(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohex-1-ene.

Comparative Example 1

15   **Use of DAST as Fluorinating Reagent**

A one liter flask which had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure.   (R)-6-(2-(2-
20   (Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene
(68 g, MW=530, 0.128 mole) was added by dropwise
addition to the flask, which already contained a
solution of diethylaminosulfur trifluoride (DAST, 25 g,
25   MW=161, 0.155 mole) in methyl t-butyl ether (300 mL) at
-13°C. The resulting mixture was then warmed to room
temperature. The mixture was stirred at room
temperature for 12 hours. The mixture was then poured
into 150 mL of water. The resulting upper ether layer
30   containing the desired product was separated and
subsequently washed with 5% sodium carbonate and water.
The ether was stripped in vacuo to give 65 g of crude
product, which by gc analysis was found to contain 14
area % of elimination product, 85 area % of the desired
35   (S)-6-(2-(2-(nonafluorobutoxy)tetrafluoroethoxy)-2,2-

-15-

difluoroethoxy)-5-fluorohex-1-ene, and 1 area % of unreacted (R)-6-(2-(2-(nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-hydroxyhex-1-ene. Fractional distillation through a column of steel helices at a 3/1 reflux ratio and 0.1 mm pressure gave 31.2 g of product at 91% purity.

Table 1.

Process of Invention Compared to DAST Fluorination of (R)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-hydroxyhex-1-ene

$CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2O(CF_2)_2OC_4F_9$ (Starting OH-Functional Compound) --->

$CH_2=CH(CH_2)_2CH(F)CH_2OCH_2CF_2O(CF_2)_2OC_4F_9$ (Desired Product)

and/or $CH_2=CH(CH_2)_2CH=CHOCH_2CF_2O(CF_2)_2OC_4F_9$ (Elimination Product)

Example No.	Fluorinating Reagent (equivalents)	Solvent	GC Area % of Product (Elimination/ Desired/OH)
C1	DAST (1.2)	Methyl Butyl Ether	14/85/1
1	PBSF(1.6)/ DBU(1.6)	Methyl Butyl Ether	9/88/3
2	PBSF(1.8)/ DBU(1.8)	Toluene	8/92/0

The data in Table 1 shows that less elimination product (relative to desired product and unreacted OH compound, as measured by gc) was obtained by using the process of the invention than was obtained by using DAST fluorination.

Examples 3-7 and Comparative Examples 2-7

Examples 3-7 and Comparative Examples 2-7 were prepared essentially as described in Example 2. Gas chromatography area % ratios were measured for the resulting crude product after stripping of solvent in vacuo.

Table 2.

Different Bases and Solvents

$CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2O(CF_2)_2OC_4F_9$ (Starting OH-
Functional Compound) + R_fSO_2F + Base---→
$CH_2=CH(CH_2)_2CH(F)CH_2OCH_2CF_2O(CF_2)_2OC_4F_9$ (Desired Product)
or $CH_2=CH(CH_2)_2CH=CHOCH_2CF_2O(CF_2)_2OC_4F_9$ (Elimination
Product) + $R_fSO_3^-$ Hbase$^+$

(R)-6-(2-(2—(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxcy)-5-hydroxyhex-1-ene
→(S)-6-(2-(2—(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohex-1-ene

Example No.	Solvent	Base (equiv-alents)	R_fSO_2F (equiv-alents)	GC Area% of Product (elimination /desired/OH)	Proton Affinity (kj/mole)[e]
3	diglyme	DBU (1.45)	PBSF(1.46)	13/79/8	1048
4	diglyme	DBU (1.73)	PBSF(1.56)	6/79/14	1048
C2	diglyme	Bu_3N(1.73)	PBSF(1.46)	1/19/80	999
C3	diglyme	$(iPr)_2EtN$ (1.73)	PBSF (1.46)	1/7/93	994

Example No.	Solvent	Base (equivalents)	R$_f$SO$_2$F (equivalents)	GC Area% of Product (elimination /desired/OH)	Proton Affinity (kj/mole)[8]
1	Methyl Butyl ether	DBU (1.59)	PBSF (1.59)	9/88/3	1048
C4	Methyl Butyl ether	DABCO(1.7)	PBSF(1.56)	0/0/100	963
5	diglyme	DBU (1.73)	PBSF(1.56)	8/90/1	1048
6	toluene	DBU (1.78)	PBSF(1.82)	12/84/4	1048
7	toluene	DBN (1.6)	PBSF (1.6)	9/88/3	1038
2	toluene	DBU (1.8)	PBSF(1.80)	8/92/0	1048
C5	toluene	1,8-bis-(dimethyl amino)nap thalene (1.80)	PBSF (1.8)	0/0/100	1029
C6	toluene	N,N,N',N'-tetrameth yl-1,4-butanedia mine (1.8)	PBSF (1.8)	0/0/100	1036
C7	toluene	N,N,N',N'-tetrameth yl-1,3-propanedi amine (1.8)	PBSF (1.8)	0/0/100	1035

DBU   DBN   DABCO

The data in Table 2 shows the effectiveness of
strong, non-nucleophilic organic amines that contain a
double bond, compared with those without a double bond,
as well as the usefulness of a range of solvents in the
process of the invention. Comparative organic bases
having lower base strengths and no double bond (for
example, DABCO, 1,4-diazabicyclo[2.2.2]octane (proton
affinity of 963 kj/mole, E. P. Hunter and S. G. Lias,
"Proton Affinity Evaluation" in NIST Chemistry WebBook,
NIST Standard Reference Database Number 69, Eds. W. G.
Mallard and P. J. Linstrom, March 1998, National
Institute of Standards and Technology, Gaithersburg, MD
20899 (http://webbook.nist.gov)), N,N-diisopropylethyl
amine (proton affinity of 994 kj/mole), and tributyl
amine (proton affinity of 999 kj/mole)) provided low
(or even zero) percent conversion to the desired
fluorocompound and, upon aqueous workup, left unreacted
alcohol. Trialkyl amines of sufficient base strength,
but without a double bond (for example, N,N,N',N'-
tetramethyl-1,4-butanediamine (proton affinity of 1046
kj/mole) and N,N,N',N'-tetramethyl-1,3-propanediamine
(proton affinity of 1035 kj/mole)), failed to provide
the desired fluorocompound product. Perfluorobutane
sulfonyl fluoride (PBSF) and other perfluoroalkane
sulfonyl fluorides are known to quaternize the nitrogen
of the pyridine ring of strong, nucleophilic amine
bases such as dimethylaminopyridine, in the presence of
a hydroxyl group (e.g., see H. Vorbruggen et al., Bull.
Soc. Chim. Belg. 103, 453 (1994), and U.S. Patent No.
3,419,595 (Hansen)).

Example 8

(S)-6-(2-(2—(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-fluorohex-1-ene

A one liter flask that had been oven dried was
5   assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (S)-6-(2-(2—
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene (20 g, MW=530, 0.038
10 mole), perfluorooctanesulfonyl fluoride (POSF) (30 g,
MW=502, 0.06 mole), and 40 mL toluene were added to the
flask, and then the resulting mixture was cooled to 0°C
using a cooling bath. After about 5 minutes, the
addition of 9.9 g DBU (MW=152, 0.065 mole) was begun.
15 The DBU was added at such a rate that the temperature
of the mixture did not rise above 10°C. The cooling
bath was removed, and the mixture was stirred for one
hour. While stirring, 40 ml toluene and then 100 mL
water were added. Three phases formed, and the top
20 yellow toluene phase was saved as product. The black
lower phase and the clear middle phase were re-
extracted with an additional 100 ml of toluene, which
was combined with the previously isolated toluene
phase. The toluene phase was washed three more times
25 with water (100 ml). The toluene phase was stripped at
reduced pressure on a rotary evaporator to give 14 g of
crude product, which by gc was found to contain 10 area
% elimination product and 88 area % desired product.
The crude product was one plate distilled to give
30 product (10.4 g, distilled at 41-42°C at 0.03 mm) found
by gc to be 92% desired product.

Table 3.

POSF Compared With PBSF in Fluorination of

(R)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene

Example Number	Solvent	Base (equiv- alents)	R_fSO_2F (equiv- alents)	GC Area % (Elimination/ Desired/OH)
2	Toluene	DBU (1.8)	PBSF (1.80)	8/92/0
8	Toluene	DBU (1.6)	POSF (1.7)	10/90/0

The data in Table 3 shows that POSF is similar to
PBSF in effectiveness for converting primary and
secondary alcohols to the corresponding fluorides.

Example 9

(S)-8-(2-(2—(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-7-fluorooct-1-ene

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (R)-8-(2-(2—
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-7-hydroxyoct-1-ene (11.3 g at 93%,
MW=558, 0.0188 mole), PBSF (10.5 g, MW=302, 0.035
mole), and 30 mL toluene were added to the flask, and
then the resulting mixture was cooled to 0°C using a
cooling bath. After about 5 minutes, the addition of
5.3 g DBU (MW=152, 0.035 mole) was begun. The DBU was
added at such a rate that the temperature of the
mixture did not rise above 10°C. The cooling bath was
removed, and the mixture was stirred for one hour.

-21-

While stirring, 200 mL toluene was added, then 200 ml
water. Three layers formed, and the top yellow toluene
layer was saved as product. The toluene layer was
washed three more times with water (50 mL). The
5   toluene layer was stripped at reduced pressure on a
rotary evaporator to give 10.1 g of stripped product,
which was shown by gc to be 14 area % elimination
product and 86 % desired product. The stripped product
was one plate distilled in a Kugelrohr apparatus to
10   give product (8.9 g, distilled at 90-110°C at 0.01 mm)
that was found by gc to be 79% desired product. The
yield {100(0.79)(8.9)/10.5(0.93)} was 67%.

Example 10

15   (S)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohex-1-ene

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
20   nitrogen pressure. (R)-8-(2-(2-
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%,
MW=530, 0.038 mole), PBSF (18 g, MW=302, 0.06 mole),
and 40 mL toluene were added to the flask, and then the
25   resulting mixture was cooled to 0°C using a cooling
bath. After about 5 minutes, the addition of 10 g DBU
(MW=152, 0.066 mole) was begun. The DBU was added at
such a rate that the temperature of the mixture did not
rise above 10°C. The cooling bath was removed, and the
30   mixture was stirred for one hour. While stirring, 200
mL toluene was added, then 200 mL water. Three layers
formed, and the top yellow toluene layer was saved as
product. The toluene layer was washed three more times
with water (200 mL). The toluene layer was stripped at
35   reduced pressure on a rotary evaporator to give 20.8 g.

The stripped product was one plate distilled to give product (15.4 g, distilled at 62-70°C at 0.3 mm) that was found by gc to be 82% desired product. NMR showed the product to be 83 weight % of the desired

5   fluorocompound, $4220CH_2C(*)HF(CH_2)_2CH=CH_2$, 6% trans-$4220CH_2C(*)H=CHCH_2CH=CH_2$, 1% cis-$4220CH_2C(*)H=CHCH_2CH=CH_2$, 8.4% $4220CH_2C(*)(OH)(CH_2)_2CH=CH_2$, 3.6% trans-$4220CH=CH(CH_2)_2CH=CH_2$, 1.5% cis-$4220CH=CH(CH_2)_2CH=CH_2$.

10 The yield {100(15.4)0.83/21.5(0.93)} was 64%.

Example 11

(S)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-fluorohex-1-ene

15   A one liter flask that had been oven dried was assembled hot with an overhead stirrer, an addition funnel, and a thermocouple and was kept under positive nitrogen pressure. (R)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-

20 difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%, MW=530, 0.038 mole), PBSF (26.6 g, MW=302, 0.088 mole), and 40 mL toluene were added to the flask, and then the resulting mixture was cooled to 0°C using a cooling bath. After about 5 minutes, the addition of DBU (12.8

25 g, MW=152, 0.084 mole) was begun. The DBU was added at such a rate that the temperature of the mixture did not rise above 10°C. The cooling bath was removed, and the mixture was stirred for one hour. While stirring, 200 mL toluene was added, then 200 mL water. Three layers

30 formed, and the top yellow toluene layer was saved as product. The toluene layer was washed three more times with water (200 mL). The toluene layer was stripped at reduced pressure on a rotary evaporator to give 18.4 g of stripped product, which by gc was found to be 72.3

35 area % desired product and 6.7 area % elimination

product. The stripped product was then distilled to
give product (15.9 g, distilled at 62-90°C at 0.01 mm)
that was found by gc to be 83% pure. The yield
{100(15.9)0.83/21.5(0.93)} was 66%.

Example 12

**(S)-6-(2-(2—(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohex-1-ene**

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (R)-6-(2-(2—
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%,
MW=530, 0.038 mole), PBSF (16g, MW=302, 0.053 mole),
and 40 mL toluene were added to the flask, and then the
resulting mixture was cooled to 0°C using a cooling
bath. After about 5 minutes, the addition of DBU (15.6
g, MW=152, 0.102 mole) was begun. The DBU was added at
such a rate that the temperature of the mixture did not
rise above 10°C. The cooling bath was removed, and the
mixture was stirred for 30 minutes. Then the mixture
was sampled and found by gc to be 81% desired product
and 8.3% elimination product. While stirring, 200 mL
toluene was added and then 200 mL water. Three layers
formed, and the top yellow toluene layer was saved as
product. The toluene layer was washed three more times
with water (200 mL). The toluene layer was stripped at
reduced pressure on a rotary evaporator to give 18.4 g
of stripped product, which was then distilled to give
product (16.7 g, distilled at 45-85°C at 0.01 mm) that
was found to be 84% pure by gc. The yield
{(100)16.6(0.84)/21.5(0.93)} was 70%.

Example 13

(S)-6-(2-(2—(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-fluorohex-1-ene Using a Premix of Alcohol and Base (Less than 2 Equivalents of Base)

5   A one liter flask that had been oven dried was assembled hot with an overhead stirrer, an addition funnel, and a thermocouple and was kept under positive nitrogen pressure. (R)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-

10   difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%, MW=530, 0.038 mole), DBU (6.1 g, MW=152, 0.04 mole), and 40 mL toluene were added to the flask, and then the resulting mixture was cooled to 0°C using a cooling bath. After about 5 minutes, the addition of PBSF

15   (17.7 g, MW=302, 0.059 mole) was begun. The PBSF was added at such a rate that the temperature of the mixture did not rise above 10°C. The cooling bath was removed, and the mixture was stirred for one hour. The mixture was sampled at this point and found by gc to be

20   6.5% elimination product, 76.0% desired product, and 10.9% unreacted alcohol. While stirring, 200 mL toluene was added, then 200 mL water. Three layers formed, and the top yellow toluene layer was saved as product. The toluene layer was washed three more times

25   with water (200 mL). The toluene layer was stripped at reduced pressure on a rotary evaporator to give 20 g of stripped product, which was one plate distilled at 0.01 mm at a pot temperature of 44-85°C to give 18.6 g of product, which by gc was found to be 76.1% desired

30   product, 5.6% elimination product, and 9.9% unreacted alcohol. The yield ((100)18.6(0.761)/21.5(0.93) was 71%.

Example 14

(S)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-fluorohex-1-ene Using a Premix of Alcohol and Base (Less than 2 Equivalents of Base)

A one liter flask that had been oven dried was assembled hot with an overhead stirrer, an addition funnel, and a thermocouple and was kept under positive nitrogen pressure. (R)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%, MW=530, 0.038 mole), DBU (6.1 g, MW=152, 0.04 mole), and 40 mL toluene were added to the flask, and then the resulting mixture was cooled to 0°C using a cooling bath. After about 5 minutes, the addition of PBSF (25.4 g, MW=302, 0.084 mole) was begun. The PBSF was added at such a rate that the temperature of the mixture did not rise above 10°C. The cooling bath was removed, and the mixture was stirred for one hour. The mixture was sampled at this point and found by gc to be 6.1% elimination product, 70% desired product, and 12.3% unreacted alcohol. While stirring, 200 mL toluene was added and then 200 mL water. Three layers formed, and the top yellow toluene layer was saved as product. The toluene layer was washed three more times with water (200 mL). The toluene layer was stripped at reduced pressure on a rotary evaporator to give 20.4 of stripped product, which was one plate distilled at 0.01 mm and 44-85°C to give 17.2 g of product, which by gc was found to be 71% desired product, 6.2% elimination product, and 11.9% unreacted alcohol. The yield {(100)17.2(0.71)/21.5(0.93)} was 61%.

Example 15

(S)-6-(2-(2—(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-fluorohex-1-ene Using a Premix of Alcohol and Base (Less than 2 Equivalents of Base)

5   A one liter flask that had been oven dried was assembled hot with an overhead stirrer, an addition funnel, and a thermocouple and was kept under positive nitrogen pressure. (R)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-

10 difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%, MW=530, 0.038 mole), DBU (10 g, MW=152, 0.066 mole), and 40 mL toluene were added to the flask, and then the resulting mixture was cooled to 0°C using a cooling bath. After about 5 minutes, the addition of PBSF (18

15 g, MW=302, 0.06 mole) was begun. The PBSF was added at such a rate that the temperature of the mixture did not rise above 10°C. The cooling bath was removed, and the mixture was stirred for one hour. While stirring, 200 mL toluene was added and then 200 mL water. Three

20 layers formed, and the top yellow toluene layer was saved as product. The toluene layer was washed three more times with water (200 mL). The toluene layer was stripped at reduced pressure on a rotary evaporator to give 17.9 g of stripped product, which by gc was found

25 to be 81 and 8.2 area % desired product and elimination product, respectively. The stripped product was one plate distilled to give product (15.4 g, distilled at 43-106°C at 0.01 mm) that was found by gc to be 82% desired product. The yield

30 {(100)15.4(0.82)/21.5(0.93)} was 63%.

Comparative Example 8

(S)-6-(2-(2—(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-fluorohex-1-ene Using a Premix of

35 **Alcohol and Base (More than 2 Equivalents of Base**

According to the Method of U.S. Patent No. 5,760,255 (Vorbrueggen))

A one liter flask that had been oven dried was assembled hot with an overhead stirrer, an addition funnel, and a thermocouple and was kept under positive nitrogen pressure. (R)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%, MW=530, 0.038 mole), DBU (13g, MW=152, 0.085 mole), and 40 mL toluene were added to the flask, and then the resulting mixture was cooled to 0°C using a cooling bath. After about 5 minutes, the addition of PBSF (21 g, MW=302, 0.07 mole) was begun. The PBSF was added at such a rate that the temperature of the mixture did not rise above 10°C. The cooling bath was removed, and the mixture was stirred for one hour. While stirring, 200 mL toluene was added, then 200 mL water. Three layers formed, and the top yellow toluene layer was saved as product. The toluene layer was washed three more times with water (200 mL). The toluene layer was stripped at reduced pressure on a rotary evaporator to give 17.1 g of stripped product, which was then one plate distilled to give product (13.8 g, distilled at 62-70°C at 0.05-.3 mm) that was found by gc to be 70% desired product. The yield {(100)13.8(0.70)/21.5(0.93)} was 48%.

Comparative Example 9

(S)-8-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-7-fluorooct-1-ene Using a Premix of Alcohol and Base (More than 2 Equivalents of Base According to the Method of U.S. Patent No. 5,760,255 (Vorbrueggen))

A one liter flask that had been oven dried was assembled hot with an overhead stirrer, an addition funnel, and a thermocouple and was kept under positive

-28-

nitrogen pressure. (R)-8-(2-(2-
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-7-hydroxyoct-1-ene (11.3 g at 93%,
MW=558, 0.020 mole), DBU (7 g, MW=152, 0.046 mole), and
5   30 mL toluene were added to the flask, and then the
resulting mixture was cooled to 0°C using a cooling
bath. After about 5 minutes, the addition of PBSF
(11.1 g, MW=302, 0.037 mole) was begun. The PBSF was
added at such a rate that the temperature of the
10   mixture did not rise above 10°C. The cooling bath was
removed, and the mixture was stirred for one hour.
While stirring, 200 mL toluene was added and then 200
mL water. Three layers formed, and the top yellow
toluene layer was saved as product. The toluene layer
15   was washed three more times with water (50 mL). The
toluene layer was stripped at reduced pressure on a
rotary evaporator to give 7.3 g of stripped product,
which was then one plate distilled to give product (6.0
g, distilled at 62-70°C at 0.03-0.3 mm) that was found
20   by gc to be 74.5% desired product. The yield
{(100)6.0(0.745)/11.3(0.93)} was 43%.

Comparative Example 10
(S)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
25   difluoroethoxy)-5-fluorohex-1-ene Using a Premix of
Alcohol and Base (More than 2 Equivalents of Base
According to the Method of U.S. Patent No. 5,760,255
(Vorbrueggen))
        A one liter flask that had been oven dried was
30   assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (R)-6-(2-(2-
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%,
35   MW=530, 0.038 mole), DBU (15.6 g, MW=152, 0.103 mole),

and 40 mL toluene were added to the flask, and then the
resulting mixture was cooled to 0°C using a cooling
bath. After about 5 minutes, the addition of PBSF (16
g, MW=302, 0.053 mole) was begun. The PBSF was added
5   at such a rate that the temperature of the mixture did
not rise above 10°C. The cooling bath was removed, and
the mixture was stirred for 30 minutes. Then the
mixture was sampled and found by gc to be 80 area %
desired product and 13.6 area % elimination product.
10 While stirring, 200 mL toluene was added, then 200 mL
water. Three layers formed, and the top yellow toluene
layer was saved as product. The toluene layer was
washed three more times with water (200 mL). The
toluene layer was stripped at reduced pressure on a
15 rotary evaporator to give 15.8 g of stripped product,
which was then distilled to give product (15.1 g,
distilled at 45-85°C at 0.01 mm) that was found by gc to
be 73.5% desired product. The yield
{(100)15.1(0.735)/21.5(0.93)} was 56%.
20

Comparative Example 11

(S)-6-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohex-1-ene Using a Premix of
Alcohol and Base (More than 2 Equivalents of Base
25 According to the Method of U.S. Patent No. 5,760,255
(Vorbrueggen))

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
30 nitrogen pressure. (R)-6-(2-(2-
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%,
MW=530, 0.038 mole), DBU (18.3 g, MW=152, 0.12 mole),
and 40 mL toluene were added to the flask, and then the
35 resulting mixture was cooled to 0°C using a cooling

-30-

bath. After about 5 minutes, the addition of PBSF
(12.7 g, MW=302, 0.04 mole) was begun. The PBSF was
added at such a rate that the temperature of the
mixture did not rise above 10°C. The cooling bath was

5   removed, and the mixture was stirred for one hour. The
mixture was sampled at this point and found by gc to be
14.2% elimination product and 69% desired product.
While stirring, 200 mL toluene was added, then 200 mL
water. Three layers formed, and the top yellow toluene

10   layer was saved as product. The toluene layer was
washed three more times with water (200 mL). The
toluene layer was stripped at reduced pressure on a
rotary evaporator to give 17.8 g of stripped product,
which was one plate distilled at 0.01 mm at a pot

15   temperature of 45-92°C to give 14.1 g of material, which
by gc was found to be 69.7% desired product, 13.7%
elimination product, and 6.5% unreacted alcohol. The
yield {(100)14.1(0.697)/21.5(0.93) was 49%.

20   **Comparative Example 12**
(S)-6-(2-(2—(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohex-1-ene Using a Premix of
Alcohol and Base (More than 2 Equivalents of Base
According to the Method of U.S. Patent No. 5,760,255

25   (Vorbrueggen))

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (R)-6-(2-(2—

30   (nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene (21.5 g at 93%,
MW=530, 0.038 mole), DBU (18.3 g, MW=152, 0.12 mole),
and 40 mL toluene were added to the flask, and then the
resulting mixture was cooled to 0°C using a cooling

35   bath. After about 5 minutes, the addition of PBSF

(25.3 g, MW=302, 0.084 mole) was begun. The PBSF was
added at such a rate that the temperature of the
mixture did not rise above 10°C. The cooling bath was
removed, and the mixture was stirred for one hour. The
5   mixture was sampled at this point and found by gc to be
12.8% elimination product and 71.7% desired product.
While stirring, 200 mL toluene was added and then 200
mL water. Three layers formed, and the top yellow
toluene layer was saved as product. The toluene layer
10   was washed three more times with water (200 mL). The
toluene layer was stripped at reduced pressure on a
rotary evaporator to give 15.4 g of stripped product,
which was one plate distilled at 0.01mm and 44-92°C to
give 10.8 g of material which by gc was found to be
15   73.6% desired product and 12.9 % elimination product.
The yield {(100)10.8(0.736)/21.5(0.93)} was 40%.

Table 4.

Comparison of Process of Invention with Method of U.S. Patent No. 5,760,255
(Vorbrueggen)

Example Number	Alcohol*	Premix**	DBU (equivalents)	PBSF (equivalents)	GC Area % (Elimination/ Desired)	% Yield (Desired Product on Distillation)[e]
9	Alcohol 1	Premix A	1.86	1.86	14/86	67
10	Alcohol 2	Premix A	1.74	1.57	7/93	64
11	Alcohol 2	Premix A	2.2	2.3	8/92	66
12	Alcohol 2	Premix A	2.7	1.4	9/91	65
13	Alcohol 2	Premix B	1.05	1.54	8/92	71
14	Alcohol 2	Premix B	1.05	2.21	8/92	61
15	Alcohol 2	Premix B	1.74	1.57	9/91	63
C8	Alcohol 2	Premix B	2.26	1.84	22/78	48
C9	Alcohol 1	Premix B	2.3	1.85	25/75	42
C10	Alcohol 2	Premix B	2.5	1.26	15/85	56
C11	Alcohol 2	Premix B	3.16	1.1	17/83	49
C12	Alcohol 2	Premix B	3.16	2.2	15/85	40

* Alcohol 1 =   (R)-8-(2-(2-
(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-7-hydroxyoct-1-ene
     Alcohol 2 =   (R)-6-(2-(2-
(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-hydroxyhex-1-ene

** Premix A =   Alcohol and Sulfonyl Fluoride
      Premix B =   Alcohol and Base

@ Yield data is on volatile fraction upon distillation,
accounting for gc purity. Data does not account for
losses routinely associated with purification
operations such as fractional distillation or
chromatography.

     The data in Table 4 shows that the processes of
the invention provided a reduced amount of elimination
product and an increased yield of desired product,
relative to the comparative process. When a premix of
alcohol and sulfonyl fluoride was used, the yields of
desired product were found to be surprisingly
insensitive to the amount of base added.

Example 16
(S)-10-(2-(2-(Pentafluoroethoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-9-fluorodec-1-ene
     A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (R)-10-(2-(2-
(Pentafluoroethoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)

-9-hydroxydec-1-ene (62.7 g, MW=486, 0.129 mole) and
120 mL toluene were added to the flask, and then the
flask and its contents were cooled to -15°C using a
cooling bath. PBSF (69 g, MW=302, 0.226 mole) was then
5   added to the flask. After about 5 minutes, the
addition of DBU (36.7 g, MW=152, 0.239 mole) was begun.
The DBU was added at such a rate that the temperature
did not rise above 5°C. The cooling bath was removed,
and the resulting mixture was stirred for one hour.
10   While stirring, 120 mL toluene was added, then 120 mL
water. Three layers formed, and the top yellow toluene
layer was saved as product. The toluene layer was
washed with 120 mL of 7% aqueous HCl. The toluene
layer was stripped at reduced pressure on a rotary
15   evaporator to give 55.9 g of stripped product, which
was distilled through a 3-plate Snyder column with a
splitter at 1/1 reflux ratio to give product (35.9 g,
distilled at 75-77°C at 0.03 mm) that was found by gc to
be 92% desired product. The yield
20   ((100)35.9(0.92)/62.7) was 53%.

Example 17
6-(4-(Heptafluoropropoxy)-2,2,3,3,4,4-
hexafluorobutoxy)-(S)-3-fluorohexoxyprop-1-ene
25   A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. 6-(4-(Heptafluoropropoxy)-
2,2,3,3,4,4-hexafluorobutoxy)-(R)-3-hydroxyhexoxyprop-
30   1-ene (28.6 g, MW=521, 0.055 mole) and 75 mL toluene
were added to the flask, and then the flask and its
contents were cooled to -15°C using a cooling bath.
PBSF (26.5 g, MW=302, 0.088 mole) was then added to the
flask. After about 5 minutes, the addition of DBU
35   (14.2 g, MW=152, 0.094 mole) was begun. The DBU was

added at such a rate that the temperature did not rise
above 5°C. The cooling bath was removed, and the
resulting mixture was stirred for one hour. While
stirring, 75 mL toluene was added, then 75 mL water.

5   Three layers formed, and the top yellow toluene layer
was saved as product. The toluene layer was washed
with 75 mL of 7% aqueous HCl and then stripped at
reduced pressure on a rotary evaporator. The stripped
product was distilled in a Kugelhohr apparatus at 0.05

10 mm (oven temp 67-82°C) to give 22 g of product found by
gc to be 96% desired product. The yield
((100)22(0.96)/28.6) was 74%.

Example 18

15 (S)-8-(3-(Pentafluoroethoxy)-2,2,3,3-
tetrafluoropropoxy)-7-fluorooct-1-ene

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive

20 nitrogen pressure.   (R)-8-(3-(Pentafluoroethoxy)-
2,2,3,3-tetrafluoropropoxy)-7-hydroxyoct-1-ene
(76 g at 85% purity by gc, MW=292, 0.221 mole) and 100
mL toluene were added to the flask, and then the flask
and its contents were cooled to -15°C using a cooling

25 bath. PBSF (91 g, MW=302, .301 mole) was then added to
the flask. After about 5 minutes, the addition of DBU
(52 g, MW=152, 0.34 mole) was begun. The DBU was added
at such a rate that the temperature did not rise above
5°C. The cooling bath was removed, and the resulting

30 mixture was stirred for one hour. While stirring, 100
mL toluene was added, then 100 mL water. Three layers
formed, and the top yellow toluene layer was saved as
product. The toluene layer was washed with 100 ml of
7% aqueous HCl and then stripped at reduced pressure on

35 a rotary evaporator. The stripped product was

distilled through a 3-plate Snyder column with a
splitter at 1/1 reflux ratio to give product (35.0 g,
distilled at 43-44°C at 0.05 mm) that was found by gc to
be 92% desired product. The yield
5   ((100)35.0(0.92)/76(0.85) was 50%.

Example 19

(S)-10-(2-(2-(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-difluoroethoxy)-9-fluorodec-1-ene

10   A twelve liter flask that had been baked out was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure.   (R)-10-(2-(2-
(Nonafluorobutoxy)tetrafluoroethoxy)-2,2-
15   difluoroethoxy)-9-hydroxydec-1-ene (1754 g, MW=572,
3.07 mole) and 3300 mL toluene were added to the flask,
and then the flask and its contents were cooled to -11°C
using a cooling bath. PBSF (1656 g, MW=302, 95%
active, 5.20 moles, 1.70 equivalents/equivalent
20   alcohol) was then added to the flask. After about 30
minutes, the addition of DBU (815 g, MW=152, 5.36
moles, 1.75 equivalents/equivalent alcohol) was begun.
The DBU was added at such a rate that the temperature
did not rise above 5°C. The cooling bath was removed,
25   and the resulting mixture was stirred for two hours.
While stirring, 1650 mL toluene was added, then 520 mL
water. Three layers formed, and the top yellow toluene
layer was saved as product. The black lower layer and
the clear middle layer were rewashed with 520 mL water
30   and 1650 mL toluene. The resulting upper toluene layer
was saved and combined with the toluene layer from the
previous phase separation. The combined toluene layer
was washed with 520 mL water and then with 1566 g of 7%
aqueous HCl. Subtracting the toluene peak, gc showed
35   the material to be 87 area % of desired product and 7

area % of the byproduct formed from HF elimination. The toluene layer was stripped at reduced pressure on a rotary evaporator to give 1756 g of stripped product, which was distilled through a five plate sieve tray column to give product (1181 g, distilled at 90-98°C at 0.03 mm) that was found by gc to be 93.7% desired product (the remainder being the by-product formed by HF elimination). The molar yield {100(1181)0.937/1756} was 63%.

Example 20

(S)-10-(3-(Pentafluoroethoxy)-2,2,3,3-tetrafluoropropoxy)-9-fluorodec-1-ene

A twelve liter flask that had been baked out was assembled hot with an overhead stirrer, an addition funnel, and a thermocouple and was kept under positive nitrogen pressure. (R)-10-(3-(Pentafluoroethoxy)-2,2,3,3-tetrafluoropropoxy)-9-hydroxydec-1-ene (1530 g, MW=420, 3.64 mole) and 2160 mL toluene were added to the flask, and then the flask and its contents were cooled to -11°C using a cooling bath. PBSF (2100 g, MW=302, 95% active, 6.61 moles, 1.81 equivalents/equivalent alcohol) was then added to the flask. After about 30 minutes, the addition of DBU (1020 g, MW=152, 6.71 moles, 1.84 equivalents/equivalent alcohol) was begun. The DBU was added at such a rate that the temperature did not rise above 5°C. The cooling bath was removed, and the resulting mixture was stirred for two hours. While stirring, 2650 mL toluene was added, then 1500 mL water. Three layers formed, and the top yellow toluene layer was saved as product. The black lower layer and the clear middle layer were rewashed with 2650 mL toluene and 1500 mL water. The resulting upper toluene layer was saved and combined with the toluene layer

from the previous phase separation. The combined
toluene layer was washed with 3000 mL water and then
with 3300 g of 7% aqueous HCl. Subtracting the toluene
peak, gc showed the material to be 91 area % of desired
5   product and 9 area % of the by-product formed from HF
elimination. The toluene layer was stripped at reduced
pressure on a rotary evaporator to give 1547 g of
stripped material, which was distilled through a five
plate sieve tray column to give product (995 g,
10   distilled at 95-110°C at 0.1 mm) that was found by gc to
be 93.2% desired product (the remainder being the by-
product formed by HF elimination). The molar yield
{(100)993(0.932)/1560} was 61%.

15   **Example 21**
1-Benzyloxy-(S)-2-fluoro-3-(4-(pentafluoroethoxy)-
**2,2,3,3-tetrafluorobutoxy)propane**

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
20   funnel, and a thermocouple and was kept under positive
nitrogen pressure. 1-Benzyloxy-(S)-2-hydroxy-3-(4-
(pentafluoroethoxy)-2,2,3,3-tetrafluorobutoxy)propane
(32 g, MW=480, 0.067 mole) and 75 mL toluene were added
to the flask, and then the flask and its contents were
25   cooled to -15°C using a cooling bath. PBSF (37 g,
MW=302, 0.116 mole) was then added to the flask. After
about 5 minutes, the addition of DBU (18 g, MW=152,
0.118 mole) was begun. The DBU was added at such a
rate that the temperature did not rise above 5°C. The
30   cooling bath was removed, and the resulting mixture was
stirred for one hour. While stirring, 75 mL toluene
was added, then 75 mL water. Three layers formed, and
the top yellow toluene layer was saved as product. The
toluene layer was washed with 75 mL of 7% aqueous HCl
35   and then stripped at reduced pressure on a rotary

evaporator to give 28 g of stripped product, found by
gc to be 93 area % desired product. The stripped
product was distilled to give product (20.8 g,
distilled at 75-85°C at 0.03 mm) that was found by gc to
5   be 92% desired product. The yield {(100)20.8(0.92)/32}
was 60%.

Example 22
5-Octyl-2-[4-((S)-2-fluoro-3-(2-(2-
10 (nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)propoxy)phenyl]pyrimidine
from 5-Octyl-2-[4-((R)-2-hydroxy-3-(2-(2-
(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)propoxy)phenyl]pyrimidine

15   A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. 5-Octyl-2-[4-((R)-2-hydroxy-3-(2-
(2-(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
20 difluoroethoxy)propoxy)phenyl]pyrimidine
(5 g, MW=756, 0.0066 mole) and 20 mL toluene were added
to the flask, and then the flask and its contents were
cooled to -15°C using a cooling bath. PBSF (3.2 g,
MW=302, 0.010 mole) was then added to the flask. After
25 about 5 minutes, the addition of DBU (1.7 g, MW=152,
0.011 mole) was begun. The DBU was added at such a
rate that the temperature did not rise above 5°C. The
cooling bath was removed, and the resulting mixture was
stirred for one hour. While stirring, 100 mL toluene
30 was added, then 100 mL water. Two layers formed, and
the top yellow toluene layer was saved as product. The
toluene layer was washed with 100 mL of 7% aqueous HCl,
then with 100 mL water, followed by 100 mL water. The
toluene layer was stripped at reduced pressure on a
35 rotary evaporator to give 5.2 g of stripped product. A

thin layer chromatograph of the stripped product using
10% ethyl acetate/toluene showed no starting alcohol.
The stripped product was distilled in a Kugelrohr
apparatus at 0.05-0.1 mm (oven temp 193-210°C) to give
5   3.6 g of product, which NMR showed to be 90% desired
product, 1.2% starting alcohol, 1.7% elimination
product, and the remainder to be the phenol (C-phenyl
pyrimidine phenol). The yield {(100)3.6(0.90)/5.0} was
65%.

10

Example 23
(R)-Benzyloxy(5-fluoroheptane)
$CH_3CH_2C(*)H(F)(CH_2)_4OCH_2C_6H_5$

(R)-6-Benzyloxyhex-1-ene oxide was prepared by
15   copper catalyzed addition of 3-benzyloxypropyl-1-
magnesium bromide to R-epichlorohydrin to form R-1-
chloro-6-benzyloxyhexan-2-ol, which was then ring
closed under basic conditions to (R)-6-benzyloxyhex-1-
ene oxide. This epoxide was then treated with methyl
20   lithium (1.5 M in diethyl ether) in the presence of
dilithiotetrachlorocuprate (0.02 molar equivalents, 0.1
M in tetrahydrofuran) to yield (S)-1-benzyloxy-5-
hydroxyheptane.

A one liter flask that had been oven dried was
25   assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (S)-1-Benzyloxy-5-hydroxyheptane
(11 g, 0.0495 mole) and 140 mL toluene were added to
the flask, and then the flask and its contents were
30   cooled to -15°C using a cooling bath. PBSF (26.3 g,
MW=302, 0.0871 mole) was then added to the flask.
After about 5 minutes, the addition of DBU (14 g,
MW=152, 0.0921 mole) was begun. The DBU was added at
such a rate that the temperature did not rise above 5°C.
35   The cooling bath was removed, and the resulting mixture

was stirred for one hour. While stirring, 140 mL
toluene was added, then 100 mL water. Two layers
formed, and the top yellow toluene layer was saved as
product. The toluene layer was washed with 100 mL of

5   7% aqueous HCl, then with 100 mL water, followed by 100
mL water. The toluene layer was stripped at reduced
pressure on a rotary evaporator to give 11.3 g of gold-
colored liquid which by gc was determined to be 84%
desired product and 13% elimination (olefin) product.

10   The stripped product was chromatographed on silica gel
with 40:1 hexane/ethyl acetate (volume ratio) to give
6.05 g of clear liquid. H-NMR showed this clear liquid
to be 95% desired product, 0.4% RCH_2F, 1.4%
$RCH_2CF_2CF_2CF_2F$, and 3% ethyl ether (mole %).

15

Example 24

(R)-Benzyloxy(5-fluorooctane)

$CH_3CH_2CH_2C(*)H(F)(CH_2)_4OCH_2C_6H_5$

       (R)-6-Benzyloxyhex-1-ene oxide was prepared by
20   copper catalyzed addition of 3-benzyloxypropyl-1-
magnesium bromide to R-epichlorohydrin to form R-1-
chloro-6-benzyloxyhexan-2-ol, which was then ring
closed under basic conditions to (R)-6-benzyloxyhex-1-
ene oxide. This epoxide was then treated with ethyl

25   magnesium bromide (1.5 M in diethyl ether) in the
presence of dilithiotetrachlorocuprate (0.02 molar
equivalents, 0.1 M in tetrahydrofuran) to yield (S)-1-
benzyloxy-5-hydroxyoctane.

       A one liter flask that had been oven dried was
30   assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (S)-1-Benzyloxy-5-hydroxyoctane (22
g, 0.093 mole) and 250 mL toluene were added to the
flask, and then the flask and its contents were cooled

35   to -15°C using a cooling bath. PBSF (49.5 g, MW=302,

0.163 mole) was then added to the flask. After about 5
minutes, the addition of DBU (26 g, MW=152, 0.173 mole)
was begun. The DBU was added at such a rate that the
temperature did not rise above 5°C. The cooling bath
5   was removed, and the resulting mixture was stirred for
one hour. While stirring, 250 mL toluene was added,
then 100 mL water. Two layers formed, and the top
yellow toluene layer was saved as product. The toluene
layer was washed with 100 mL of 7% aqueous HCl, then
10 with 100 mL water, followed by 100 mL water. The
toluene layer was stripped at reduced pressure on a
rotary evaporator to give 22.9 g of gold-colored
liquid, which by gc was determined to be 83% desired
product and 16% elimination (olefin) product. The
15 stripped product was chromatograghed on silica gel with
40:1 hexane/ethyl acetate (volume ratio) to give 12.7 g
of clear liquid. H-NMR showed this clear liquid to be
97% desired product, 0.4% RCH_2F, and 1.4% $RCH_2CF_2CF_2CF_2F$
(mole %).

20

Example 25

(R)-Benzyloxy(5-fluorohexane)

$CH_3C(*)H(F)(CH_2)_4OCH_2C_6H_5$

(R)-6-Benzyloxyhex-1-ene oxide was prepared by
25 copper catalyzed addition of 3-benzyloxypropyl-1-
magnesium bromide to (R)-epichlorohydrin to form (R)-1-
chloro-6-benzyloxyhexan-2-ol, which was then dehydrated
under basic conditions to (R)-6-benzyloxyhex-1-ene
oxide. This intermediate epoxide was reduced with
30 lithium triethyl borohydride to yield (S)-1-benzyloxy-
5-hydroxyhexane.

A one liter flask that had been oven dried was
assembled hot with an overhead stirrer, an addition
funnel, and a thermocouple and was kept under positive
35 nitrogen pressure. (S)-1-benzyloxy-5-hydroxyhexane (12

-43-

g, 0.0576 mole) and 150 mL toluene were added to the
flask, and then the flask and its contents were cooled
to -15°C using a cooling bath. PBSF (30.6 g, MW=302,
0.101 mole) was then added to the flask. After about 5
5 minutes, the addition of DBU (16 g, MW=152, 0.107 mole)
was begun. The DBU was added at such a rate that the
temperature did not rise above 5°C. The cooling bath
was removed, and the resulting mixture was stirred for
one hour. While stirring, 150 mL toluene was added,
10 then 100 mL water. Two layers formed, and the top
yellow toluene layer was saved as product. The toluene
layer was washed with 100 mL of 7% aqueous HCl, then
with 100 mL water, followed by 100 mL water. The
toluene layer was stripped at reduced pressure on a
15 rotary evaporator to give 11.3 g of gold-colored
liquid, which by gc was determined to be 78% desired
product and 22% elimination (olefin) product. The
stripped product was chromatograghed on silica gel with
40:1 (by volume) hexane/ethyl acetate (volume ratio) to
20 give 4.7 g of clear liquid. H-NMR showed this clear
liquid to be 95% desired product, 0.5% $RCH_2CF_2CF_2CF_2F$, 1%
RCH_2F, and 3% ethyl ether (mole %).

Example 26

25 **(R)-6-Fluorooctene**

$C_2H_5C(*)H((F)(CH_2)_3CH=CH_2$

    (R)-6-chloro-5-hydroxy-heptene was prepared by
copper catalyzed addition of the Grignard of 4-
bromobutene with (R)-epichlorohydrin. Into a dry 1
30 liter flask under positive nitrogen pressure was placed
400 mL of dry tetrahydrofuran (THF) and 10.8 g of NaH
(60% in oil, 269 mmoles). The flask was cooled to -
10°C, and 40 g (269 mmoles) of R-6-chloro-5-hydroxy-
heptene was added slowly over a 30 minute period. The
35 reaction mixture was stirred for 90 minutes at -10°C,

-44-

before cooling the mixture to -70°C. At this time, 54
mL of 0.1M CuLi$_2$Cl$_4$ in THF (5 mmoles) and 296 mL of 1.0M
methylmagnesium bromide in butyl ether were added. The
resulting mixture was stirred at -70°C for one hour and
5   then allowed to warm to 0°C. The reaction was quenched
with saturated ammonium chloride and the mixture
stirred overnight. The resulting upper organic layer
was separated off, and the remaining water layer was
extracted with ethyl ether. Both organic phases were
10   combined and stripped under reduced pressure. The
residue was distilled at atmospheric pressure to give
20 g of material, which was 100% desired (S)-6-
hydroxyoctene by gc.

A 100 mL flask that had been oven dried was
15   assembled hot with a magnetic stirrer, an addition
funnel, and a thermocouple and was kept under positive
nitrogen pressure. (S)-6-Hydroxyoctene (20 g, 0.156
mole) and 250 mL tetraglyme (tetraethyleneglycol
dimethyl ether) were added to the flask, and then the
20   flask and its contents were cooled to -15°C using a
cooling bath. PBSF (84.6 g, MW=302, 0.280 mole) was
then added to the flask. After about 5 minutes, the
addition of DBU (45.7 g, MW=152, 0.300 mole) was begun.
The DBU was added at such a rate that the temperature
25   did not rise above 5°C. The cooling bath was removed,
and the resulting mixture was stirred for two hours.
Using a short path distillation apparatus, the product
was distilled directly out of the mixture at 1.5 mm
vacuum into a dry ice trap. A total of 11.0 g material
30   was obtained, which gc showed to be 91% desired
product. The yield {(100)11.0(0.91)/20} was 50%.

Example 27

Chirality of (S)-5-hexyloxy-2-[4-(6-(2-(2-
(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohexyl)phenyl]pyrimidine

5   In a ferroelectric liquid crystal, the
polarization and the switching are due to the chirality
of the compound(s). A loss in chirality leads to lower
polarizations and longer switching times (Tau). In
this example, the polarization and switching of (S)-5-
10   hexyloxy-2-[4-(6-(2-(2-
(nonafluorobutoxy)tetrafluoroethoxy)-2,2-
difluoroethoxy)-5-fluorohexyl)phenyl]pyrimidine,
$[C_6H_{13}O-(pyrimidineC_4H_2N_2)-C_6H_4-$
$CH_2CH_2(CH_2)_2CH(F)CH_2OCH_2CF_2O(CF_2)_2OC_4F_9]$, prepared by the
15   process of the invention (Example 1) were compared with
the polarization and switching of the same compound
prepared using DAST fluorination (Comparative Example
1). The same sign (+ or -) and the same values of the
polarization and the switching (Tau), within
20   experimental error, were observed at several different
temperatures as shown below in Table 5. This indicated
that no loss in chirality occurred when the process of
the present invention was used. As in DAST
fluorination, the process of the invention was observed
25   to maintain the enantiomeric purity of the chiral
alcohol, with complete inversion of configuration.

Table 5.

Polarization and Switching of Fluorides Prepared by
DAST Fluorination and by the Process of the Invention

Temperature, $T-T_c$ (°C)*	DAST Fluorination: Polarization (nC/cm^2)	Process of the Invention: Polarization (nC/cm^2)	DAST Fluorination: Tau (μsec)	Process of the Invention: Tau (μsec)
10	36.2	35.2	5.2	4.95
30	52.2	49.5	7.0	6.42
50	62.3	60.9	9.6	9.8

* where T_c is the smectic A to smectic C transition
5   temperature and T is the temperature of the measurement.

The polarization and the switching (Tau) of the
fluorides were determinined by the following method:

The polarization was determined essentially as
described by Miyasato et al. in Jap. J. Appl. Phys. 22,
10   661 (1983). The electronic response time, $\tau_{electric}$
(Tau), was derived from the displacement current of the
ferroelectric liquid crystal device under an applied
square voltage pulse. The current was viewed on a 100
megahertz bandwidth oscilloscope. The usual decaying
15   exponential, associated with a dielectric filled
capacitor, was followed by the spontaneous polarization
(P_s) switching pulse. The time from the rising edge of
the voltage pulse to the peak of the P_s pulse was taken
to be $\tau_{electric}$.

20   Various modifications and alterations of this
invention will become apparent to those skilled in the
art without departing from the scope and spirit of this
invention.

What Is Claimed Is:

1.   A process for preparing a fluoride from its
corresponding alcohol comprising the steps of (a)
5   forming a mixture comprising (i) at least one
fluorinated, saturated aliphatic or alicyclic sulfonyl
fluoride and (ii) at least one primary or secondary
alcohol; and (b) adding a molar excess of at least one
strong, aprotic, non-nucleophilic, hindered, double
10   bond-containing, organic base to said mixture.

2.   The process of Claim 1 further comprising the
step of cooling said mixture to a temperature in the
range of about -30°C to about 0°C before adding said
15   base.

3.   The process of Claim 1 wherein said sulfonyl
fluoride is represented by the general formula R_fSO_2F,
where R_f is selected from the group consisting of
20   perfluorinated alkyl groups having from 1 to about 10
carbon atoms; partially-fluorinated alkyl groups having
from 1 to about 10 carbon atoms; unsubstituted or
perfluoroalkyl-substituted, perfluorinated cycloalkyl
groups having from about 4 to about 8 carbon atoms; and
25   unsubstituted or perfluoroalkyl-substituted, partially-
fluorinated cycloalkyl groups having from about 4 to
about 8 carbon atoms; wherein said alcohol is
represented by the general formula R_1R_2CH-OH
where R_1 and R_2 are independently selected from the
30   group consisting of branched or linear aliphatic
groups, alicyclic groups, araliphatic groups, aromatic
groups, hydrogen, branched or linear fluoroaliphatic
groups, fluoroalicyclic groups, fluoroaraliphatic
groups, and fluoroaromatic groups; wherein said
35   aliphatic, alicyclic, araliphatic, fluoroaliphatic,

fluoroalicyclic, and fluoroaraliphatic groups can contain catenary heteratoms and/or one or two olefinic double bonds; and wherein said base is capable of enabling the formation of a sulfonate ester without

5 substantially inducing elimination.

4. The process of Claim 3 wherein said R_f is a perfluorinated alkyl group having from 1 to about 10 carbon atoms; wherein said R_1 and R_2 are independently

10 selected from the group consisting of branched or linear aliphatic groups, branched or linear fluoroaliphatic groups, araliphatic groups, and alicyclic groups; and wherein said base exhibits a gas phase proton affinity of at least about 1000 kJ/mole.

15

5. The process of Claim 1 wherein said sulfonyl fluoride is selected from the group consisting of CF_3SO_2F, $C_2F_5SO_2F$, $C_4F_9SO_2F$, $C_6F_{13}SO_2F$, $C_8F_{17}SO_2F$, $C_{10}F_{21}SO_2F$, cyclo-$(C_6F_{11})SO_2F$, C_2F_5-cyclo-$(C_6F_{10})SO_2F$, $H(CF_2)_4SO_2F$,

20 $H(CF_2)_8SO_2F$, and mixtures thereof; wherein said alcohol is selected from the group consisting of $CH_3CHOHCH(CH_3)_2$, $C_6H_{11}OH$, $C_6F_{11}CHOHCH$,

25 $C_6H_5CH_2CH_2CH_2OH_3$, $C_6F_5CH_2CH_2CH_2OH$, $C_6H_5CHOHC_6H_5$, $C_6F_5CHOHC_6H_5$, $CH_3OCOCH_2CHOHCH_2CH_3$,

30 $C_{10}H_{11}OH$ (1,2,3,4-tetrahydro-2-hydroxynaphthalene), $CH_2=CH(CH_2)_nCH(OH)CH_2OCH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$, $C_6H_5CH_2O(CH_2)_nCH(OH)CH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$, $CH_3C(=O)O(CH_2)_nCH(OH)CH_2OCH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$, THP-O$(CH_2)_nCH(OH)CH_2OCH_2-(C_xF_{2x}O)_zC_yF_{2y+1}$,

35 $C_8H_{17}-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_7H_{15}-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_6H_{13}-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_8H_{17}O-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$C_7H_{15}O-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

5   $C_6H_{13}O-C_4H_2N_2-C_6H_4O(CH_2)_nCH(OH)CH_2OCH_2(C_xF_{2x}O)_zC_yF_{2y+1}$,

$CH_3(CH_2)_bCH(OH)(CH_2)_mCH=CH_2$,

$CH_3(CH_2)_bCH(OH)(CH_2)_mOC(=O)CH_3$, $CH_3(CH_2)_bCH(OH)(CH_2)_mO-THP$,

$CH_3(CH_2)_bCH(OH)(CH_2)_mOCH_2C_6H_5$, 16alpha-hydroxyestone,

3beta-hydroxycholestan, 3alpha-andostan, 16beta-hydoxy-

10   3-[[(trifluoromethyl)sulfonyl]oxy]esta-1,3,5(10)-trien-

17-one, thymidine, 5'-deoxythymidine, uridine, 2'-

deoxyuridine, 2'-deoxy-5-(trifluoromethyl)uridine,

guanosine, 2'-deoxyguanosine, adenosine, 2'-

desoxyadensoine, 5'-deoxyadenosine, and mixtures

15   thereof, where x is independently an integer of 1 to

about 10 for each $C_xF_{2x}O$ group, y is an integer of 1 to

about 10, and z is an integer of 1 to about 10, where

n and m are independently integers of one to about ten,

b is an integer of zero to about 10, and THP =

20   tetrahydropyranyl; and wherein said base is selected

from the group consisting of N-alkyl pyrrolidines,

guanidines, and mixtures thereof.

        6.   The process of Claim 1 wherein said sulfonyl

25   fluoride is selected from the group consisting of

perfluorobutanesulfonyl fluoride,

perfluorohexanesulfonyl fluoride,

perfluorooctanesulfonyl fluoride, and mixtures thereof;

wherein said alcohol is selected from the group

30   consisting of
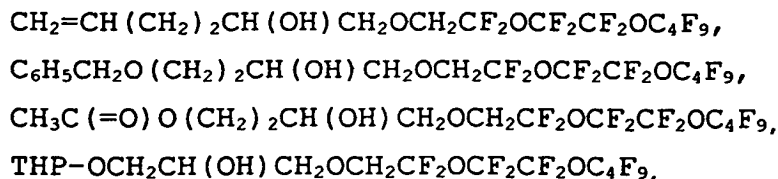
$CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,

$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,

$CH_3C(=O)O(CH_2)_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,

$THP-OCH_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,

$CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,

$CH_3C(=O)O(CH_2)_2CH(OH)CH_2CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,

$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,

$THP-O(CH_2)_2CH(OH)CH_2CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,

5    $CH_2=CH(CH_2)_2CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,

$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,

$CH_3C(=O)O(CH_2)CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,

$THP-O(CH_2)_2CH(OH)CH_2OCH_2CF_2CF_2OC_2F_5$,

$C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2C_7F_{15}$,

10   $C_6H_5CH_2O(CH_2)_2CH(OH)CH_2OCH_2C_3F_7$,

$C_8H_{17}-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2OCH_2CF_2OCF_2CF_2OC_4F_9$,

$C_8H_{17}-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2OCH_2CF_2O(CF_2CF_2O)_2CF_3$,

$C_8H_{17}O-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2O\ CH_2CF_2CF_2OC_2F_5$,

$C_8H_{17}-C_4H_2N_2-C_6H_4OCH_2CH(OH)CH_2OCH_2C_7F_{15}$,

15   $CH_3CH(OH)(CH_2)_4OCH_2C_6H_5$, $CH_3CH_2CH(OH)(CH_2)_4OCH_2C_6H_5$,

$CH_3CH_2CH_2CH(OH)(CH_2)_4OCH_2C_6H_5$,

$CH_3(CH_2)_3CH(OH)(CH_2)_4OCH_2C_6H_5$, $CH_3CH_2CH(OH)(CH_2)_3CH=CH_2$, and

mixtures thereof, where THP = tetrahydropyranyl; and

wherein said base is selected from the group consisting

20   of 1,8-diazabicyclo[5.4.0]undec-7-ene (DBU), 1,5-

diazabicyclo[4.3.0]non-5-ene (DBN), and mixtures

thereof.

7.   The process of Claim 6 wherein said sulfonyl

25   fluoride is perfluorobutanesulfonyl fluoride; and

wherein said base is 1,8-diazabicyclo[5.4.0]undec-7-ene

(DBU).

8.   The process of Claim 3 wherein said

30   fluoroaliphatic groups comprise a moiety that is

represented by the formula $-D-R_f'$, where D is selected

from the group consisting of a covalent bond, $-O-$, $-$

$OC_rH_{2r}-$, $-O(C_rH_{2r}O)_t-C_rH_{2r}-$, $-C_rH_{2r}-$, and $-(C_rH_{2r}O)_t-C_rH_{2r}-$,

where r is an integer of 1 to about 20 and t is an

35   integer of 1 to about 6; and R_f' is selected from the

group consisting of $-(C_xF_{2x}O)_zC_yF_{2y+1}$ and $-C_qF_{2q}X$, where x
is independently an integer of 1 to about 10 for each
$C_xF_{2x}O$ group, y is an integer of 1 to about 10, z is an
integer of 1 to about 10, q is an integer of 1 to about

5   15, and X is selected from the group consisting of
hydrogen and fluorine.

    9.   The process of any of the preceding claims
wherein said molar excess of base is at least about 1.2
10 equivalents per equivalent of alcohol.

    10.   The process of any of the preceding claims
wherein said process is carried out using less than
about 2 equivalents of both sulfonyl fluoride and base
15 per equivalent of alcohol.

    11.   The process of any of the preceding claims
wherein said base is added sufficiently slowly that
said mixture is maintained at a temperature below about
20 10°C.

    12.   A process for preparing a fluoride from its
corresponding alcohol comprising the steps of (a)
forming a mixture comprising (i) a sulfonyl fluoride
25 represented by the general formula R_fSO_2F, where R_f is a
perfluorinated alkyl group having from 1 to about 10
carbon atoms and (ii) at least one primary or secondary
alcohol represented by the general formula R_1R_2CH-OH
where R_1 and R_2 are independently selected from the
30 group consisting of branched or linear aliphatic
groups, alicyclic groups, araliphatic groups, aromatic
groups, hydrogen, branched or linear fluoroaliphatic
groups, fluoroalicyclic groups, fluoroaraliphatic
groups, and fluoroaromatic groups, wherein said
35 aliphatic, alicyclic, araliphatic, fluoroaliphatic,

-52-

fluoroalicyclic, and fluoroaraliphatic groups can
contain catenary heteratoms and/or one or two olefinic
double bonds; and (b) adding to said mixture a molar
excess of a strong, aprotic, non-nucleophilic,
5   hindered, double bond-containing, organic base selected
from the group consisting of N-alkyl pyrrolidines,
guanidines, and mixtures thereof.

13.   A process for preparing a fluoride from its
10 corresponding alcohol comprising the steps of (a)
forming a mixture comprising (i) at least one primary
or secondary alcohol and (ii) a molar excess of at
least one strong, aprotic, non-nucleophilic, hindered,
double bond-containing, organic base, said molar excess
15 being less than 2 equivalents of said base per
equivalent of said alcohol; and (b) adding at least one
fluorinated, saturated aliphatic or alicyclic sulfonyl
fluoride to said mixture.

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7   C07B39/00   C07C17/16   C07C41/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7   C07B   C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category°	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 760 255 A (BAYER AG) 2 June 1998 (1998-06-02) cited in the application the whole document	1-13
X	BENNUA-SKALMOWSKI B ET AL: "A facile conversion of primary or secondary alcohols with n-perfluorobutanesulfonyl fluoride/1,8-diazabicyclo'5.4.0!undec-7-ene into their corresponding fluorides" TETRAHEDRON LETT. (TELEAY,00404039);1995; VOL.36 (15); PP.2611-14, XP002120040 Schering AG;Res. Laboratories; Berlin; 13342; Germany (DE) cited in the application the whole document	1-13

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
25 October 1999	09/11/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Bonnevalle, E

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
X	BENNUA-SKALMOWSKI B ET AL: "The reaction of perfluorobutanesulfonyl fluoride with alcohols in the presence of 4-dialkylaminopyridines" BULL. SOC. CHIM. BELG. (BSCBAG,00379646);1994; VOL.103 (7-8); PP.453-61, XP000561092 Schering AG;Res. Lab.; Berlin; 13342; Germany (DE) the whole document	1-13

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 5760255 A	02-06-1998	DE	4439488 C	21-03-1996
		AU	3869795 A	23-05-1996
		WO	9613474 A	09-05-1996
		EP	0735992 A	09-10-1996
		JP	9507503 T	29-07-1997